
OMF-10 (21.310)

| Voltage | (V) | 400 |
|-----------------|--------|------|
| Motor | (kW) | 0,55 |
| Intake diameter | (mm) | 80 |
| max. airflow | (m³/h) | 600 |

| max. neg. pressure | (Pa) | 1.500 |
|---------------------------------|------|-------------------|
| Width incl. exhaust casing (mm) | | |
| Weight | (kg) | 65 |
| Dimensions (I x w x h) | (mm) | 600 x 670 x 1.130 |

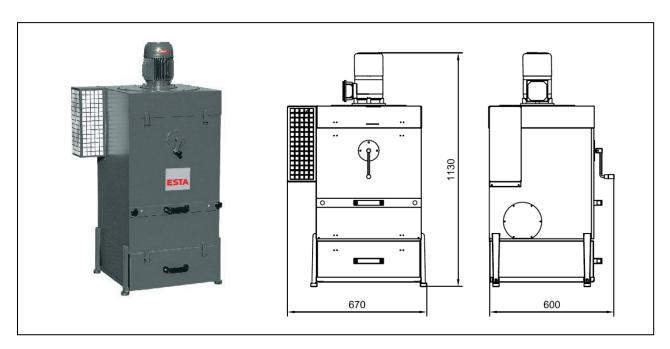

ESTA PLUS

Application range:

Intermittent or continuously use with small amounts of dust Electronics industry, Metalworking industry, Surface engineering, Machine building industry

Your benefits at a glance:

Powerful Suitable for nearly all types of dust Versatile in its use Cleanable, long life pocket type fabric filter Low operating cost Minimal space requirement

Characteristics:

Integrated spark pre-separator Cleanable pocket type fabric filter through crank mechanism

Modifications:

With different filter materials With exhaust air connection With special voltage With special painting With sound dampening muffler With mobile unit

State of the art: 21310-51-01 Subject to change without notice! For remaining questions please do not hesitate to contact us.