


# OMF-12

(21.312)

Voltage	(V)	400	max. neg. pressure	(Pa)	1.800
Motor	(kW)	1,1	Weight	(kg)	85
Intake diameter	(mm)	150	Dimensions (l x w x h)	(mm)	600 x 670 x 1.130
max. airflow	(m <sup>3</sup> /h)	800			

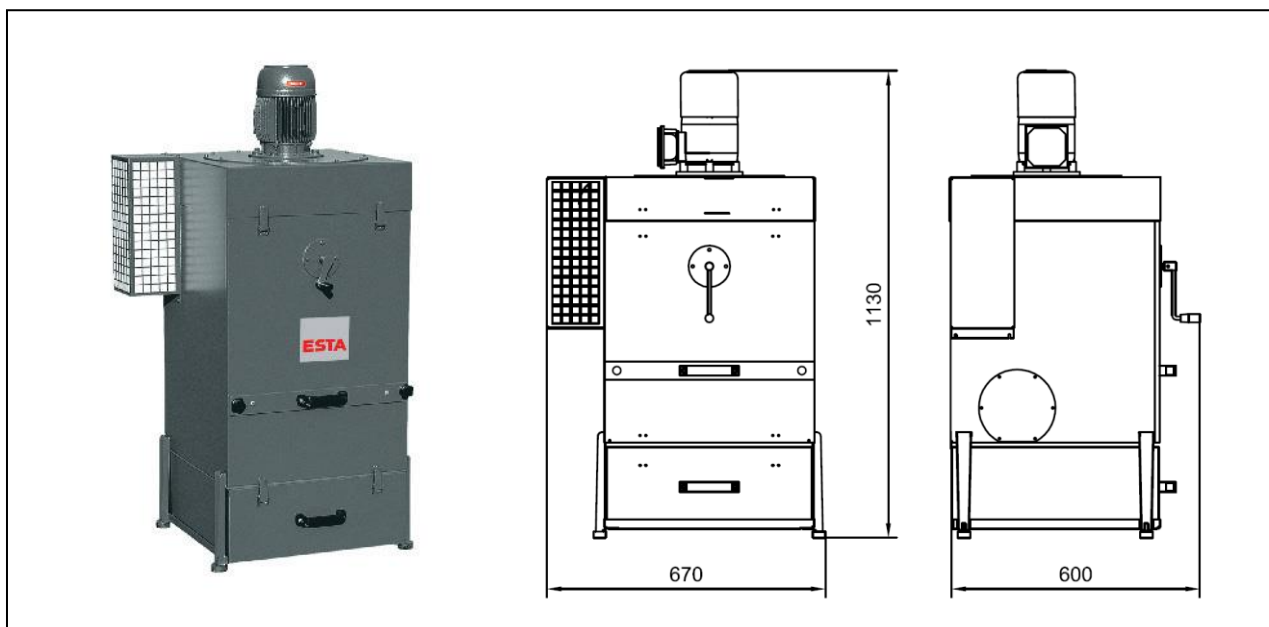

## ESTA PLUS

### Application range:

Intermittent or continuously use with small amounts of dust  
Electronics industry, Metalworking industry, Surface engineering,  
Machine building industry

### Your benefits at a glance:

Powerful  
Suitable for nearly all types of dust  
Versatile in its use  
Cleanable, long life pocket type fabric filter  
Low operating cost  
Minimal space requirement

### Characteristics:

Integrated spark pre-separator  
Cleanable pocket type fabric filter through  
crank mechanism

### Modifications :

With different filter materials  
With exhaust air connection  
With special voltage  
With special painting  
With sound dampening muffler  
With mobile unit

State of the art: 21312-51-01 Subject to change without notice! For remaining questions please do not hesitate to contact us.