


NA-K 1800 B

(45.182)

Voltage	(V)	400
Motor	(kW)	4,1
Current (400V/50Hz)	(A)	8,5
Fuse	(A)	20
max. negative pressure	(Pa)	4,300
max. airflow	(m³/h)	2,160

Water capacity	(Liter)	290
Water connection		G ¾"
Intake / Outlet diameter	(mm)	180/280
Weight (without water)	(kg)	340
Dust collection bin	(Liter)	50
Dimensions (I x w x h)	(mm) 800	x 800 x 2,920

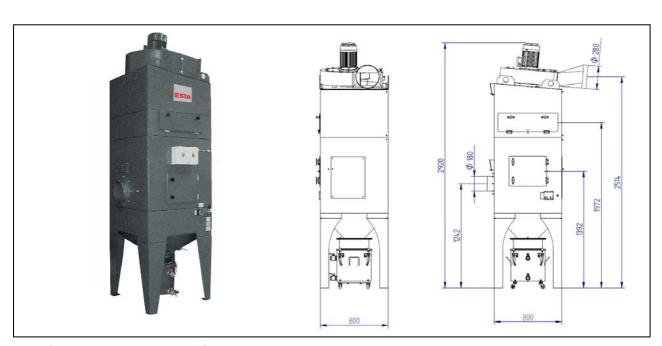

ESTA PLUS

Application range:

Extraction of aluminium dust

Dust extraction at individual or multiple workstations of adhesive and moistly dusts, especially metallic dusts that are sparks generating

As central exhaust station with intercepting pipe and several extraction points

Your benefits at a glance

High suction power for adhesive and moistly dusts Ideal solution for sparks generating applications

Characteristics:

Partially made of stainless steel, epoxy resin based interior coating Integrated control cabinet

Optional with special painting

State of the art: 45182-51-04 Subject to change without notice! For remaining questions please do not hesitate to contact us.