


SRF T-2

(55.101)

Voltage	(V)	230	Max. neg. pressure	(Pa)	19.000
Motor	(kW)	1,1	Max. airflow	(m³/h)	200
Filter surface	(m²)	0,8	Weight	(kg)	15
Rated frequency	(Hz)	50	Dimensions (L x W x H)	(mm)	390 x 210 x 500
Mode of operation		S3	Intake diameter	(mm)	50

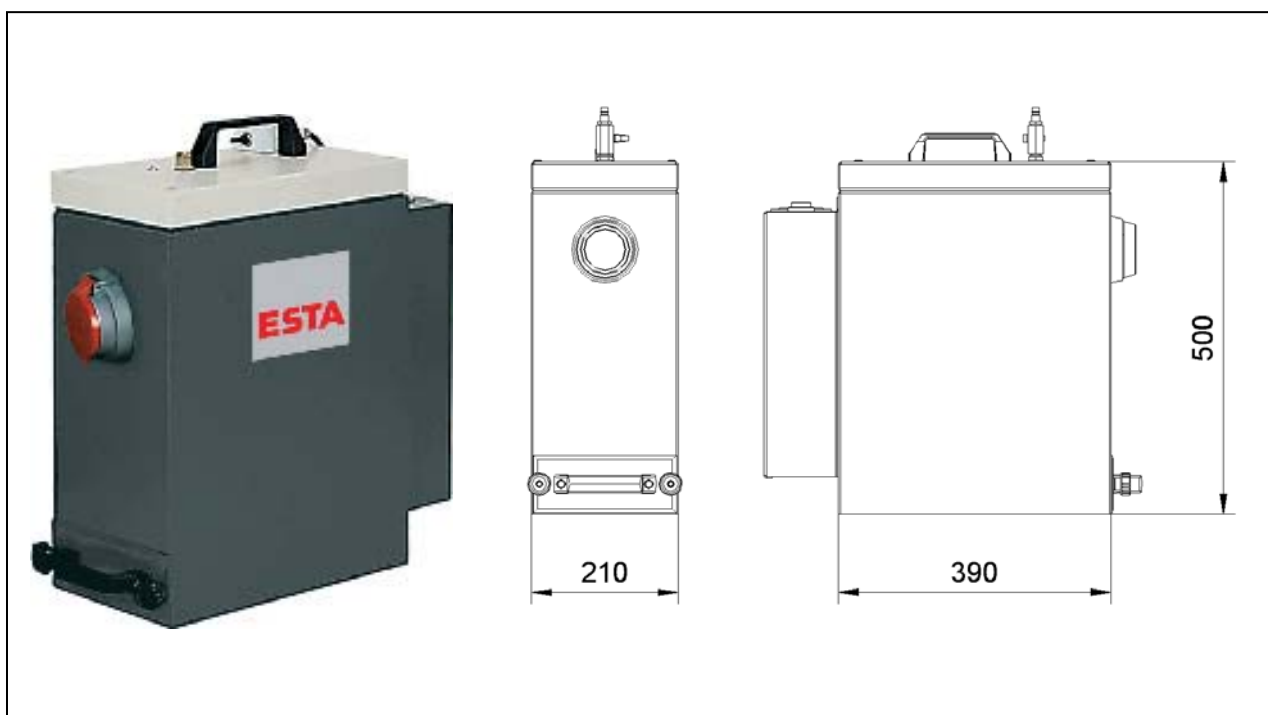

ESTA PLUS

Application Range:

Outside work, assembly or construction sites

Non-alloy steels

Your Benefits at a Glance:

Portable units that can be used in any location

Compact and functional design

Low operating costs with cleanable
long life cartridge filters (dust classification M)

Special Features:

Integrated compressed air cleaning nozzle

Custom design with custom colours and
a filter cartridge for soldering fume possible

State of Art: 55101-51-01 Subject to change without notice! For remaining questions please do not hesitate to contact us.