


# **DUSTMAC F-126**

(663.126)

Voltage	(V)	400
Motor	(kW)	11
Ampere (400V/50Hz)	(A)	20,2
Rated Frequency	(Hz)	50
Fuse	(A)	25
Max. neg. pressure	(Pa)	4,400
Max. airflow	(m <sup>3</sup> /h)	10,300
No. of magnet valves	(pc)	3
Sound power level	(dB)	85

Filter surface	(m <sup>2</sup> )	126
No. of filter elements	(pc)	6
Filter material		dust classification M antist.
Weight	(kg)	740
Intake	(mm)	355
Clean air discharge	(mm)	500
Dimensions (I x w x h)	(mm)	1,730 x 1,310 x 3,860
Dust collection bin	(litre)	50
Compressed air	(l/min)	(at 6 bar) 159,6



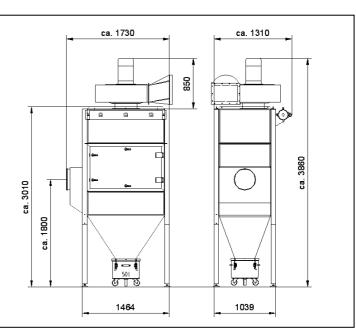

# **ESTA PLUS**

## Application range:

Central systems with multiple extraction locations Large extraction hoods or cells, e.g. robotic welding stations Low and high-alloy steels and dust

### Your benefits at a glance

High performance welding fume extraction from multiple locations, from welding cells or from large extraction hoods Application specific design of the system Modular for future expansion

Low operating costs with cleanable long life filter cartridges

### Characteristics:

Pulse-jet filter cleaning system Cleanable long life cartridge filters of dust classification M, antistatic

Special equipment with different filter cartridges, special voltage, special painting pre-separator possible

State of the art: 663126-51-00 Subject to change without notice! For remaining questions please do not hesitate to contact us.